




Current Transformer Cabinets

Kaukauna Area Units | UL Listed

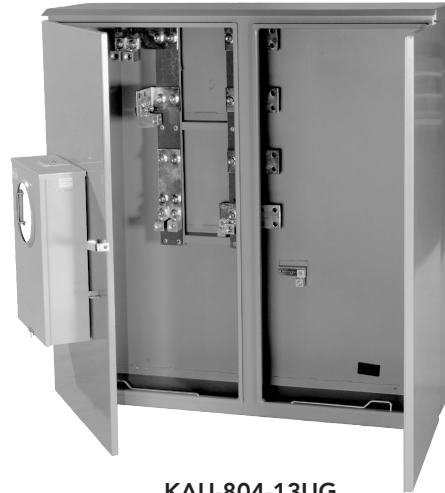

KAU-804-13UG

Overhead Entry

Catalog Number	Amps	Voltage	Phase	SCCR	Dimensions			Cabinet Drawing	Bus Drawing
					H"	W"	D"		
KAUM-404-13	400	600	3Ø4W	65kA	42	20	8	20104-01A	20104-801
KAUM-603-6	600	600	1Ø3W	65kA	42	24	8	20104-02A	20104-811
KAUM-604-13	600	600	3Ø4W	65kA	42	24	8	20104-02A	20104-811
KAUM-803-6	800	600	1Ø3W	65kA	42	24	8	20104-02A	20104-821
KAUM-804-13	800	600	3Ø4W	65kA	42	24	8	20104-02A	20104-821

Underground Entry

Catalog Number	Amps	Voltage	Phase	SCCR	Dimensions			Cabinet Drawing	Bus Drawing
					H"	W"	D"		
KAUM-404-13	400	600	3Ø4W	65kA	42	20	8	20104-01A	20104-801
KAUM-603-6UG	600	600	1Ø3W	65kA	48	46	12	20104-06A	20104-818
KAUM-604-13UG	600	600	3Ø4W	65kA	48	46	12	20104-06A	20104-818
KAUM-803-6UG	800	600	1Ø3W	65kA	48	46	12	20104-06A	20104-828
KAUM-804-13UG	800	600	3Ø4W	65kA	48	46	12	20104-06A	20104-828
KAUM-1204-13UG	1200	600	3Ø4W	85kA	48	46	12	20104-06A	20104-833
KAUM-1604-13UG	1600	600	3Ø4W	85kA	48	54	14	20104-10A	20104-855
KAUM-2004-13UG	2000	600	3Ø4W	85kA	60	60	14	20104-09A	20104-871

Notes

- All transockets include a single meter socket with prewired test switch, mounted on the door.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

