




# Metered Transformer Cabinet

U6500-X-PGE | 800 Amps



U6500-X-PGE

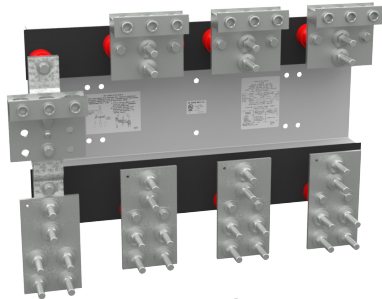

CT rack

Approved for 800 Amp applications, this larger transformer cabinet can be used for many common applications such as commercial projects, EV charging and pump stations.

## Features


- Up to 800 amps using appropriate CT rack
- Overhead/underground entry and exit
- G90 galvanized steel with gray powder coat finish
- Three phase, four wire
- NEMA 3R enclosure
- UL-listed
- Manufactured in the USA

## CT Rack Features

- CT racks are sold separately for field installation
- Per PG&E requirements the rack must be labeled for the appropriate amperage and can't show an amperage higher than what the utility is providing service for.
- **Line side:** Four studs spaced 1 3/4" on centers for phases and neutral.
- **Load side:** Three position connectors per phase and neutral for #4-600 kcmil single conductor.
  - Each port dual conductor rated for #1-250 kmil conductors.
- UL-listed.
- Manufactured in the USA.

CT Rack Product Number	Amps on Transformer Cabinet
K6300	800 Amps
K6300-600	600 Amps
K6300-400	400 Amps

## Common Applications

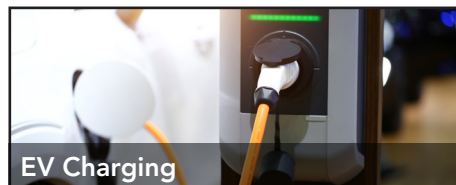


Please consult serving utility for their requirements prior to ordering, mounting or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation. **WARNING:** This product can expose you to Chromium (hexavalent compounds) which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).





# Metered Transformer Cabinet

U6500-X-PGE | 800 Amps

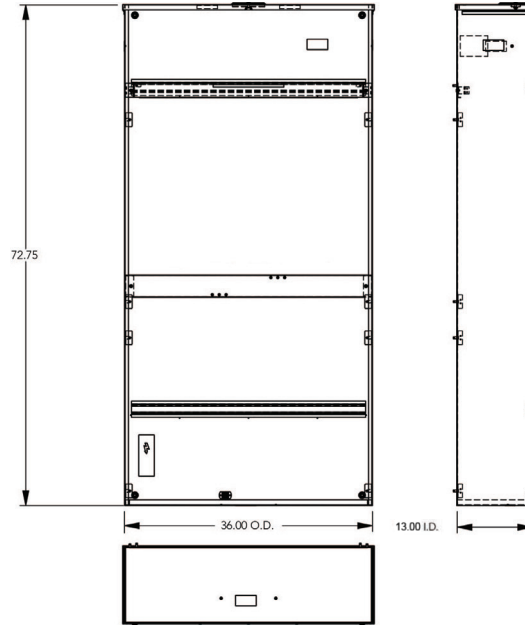

U6500-X-PGE

800 Amps | 15 Terminals | Transocket | Ring Type | 3Ø4W

Catalog Number	Service	Hub	Dimensions		
			D"	W"	H"
U6500-X-PGE	OH/UG	C.P.	13	36	67¾

## Notes

- **Knockouts:** Does not come with knockouts.
- **Cover:** This cabinet has a screw cover lift-off door.
- **Mounting:** This cabinet is designed for surface-mounting.

Please consult serving utility for their requirements prior to ordering, mounting or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation. WARNING: This product can expose you to Chromium (hexavalent compounds) which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

