




MILBANK
ENERGY AT WORK

UF4969-KO

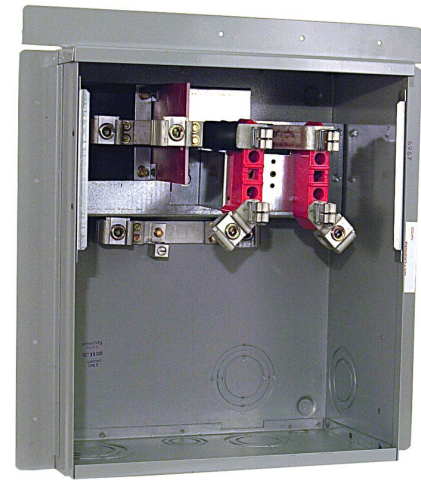

Catalog Number	UF4969-KO
Marketing Product Description	4 Terminal Ring Type Flush Mt W-flange Knockouts Switch Underground
UPC	784572269958
Length (IN)	7.5
Width (IN)	17.18
Height (IN)	17.9
Brand Name	Milbank
Type	Ring Type Meter Socket
Application	Meter Socket
Standard	UL Listed;Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	7.5L x 17.18W x 17.9H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Underground
Terminal	Single Mechanical
Insulation	Glass Polyester
Mounting	Surface Mount

Enclosure	Aluminum with Powder Coat Finish
-----------	----------------------------------

Jaw Quantity	4 Terminal
--------------	------------

Bypass Type	No Bypass
-------------	-----------

Number of Meter Positions	1 Position
---------------------------	------------

Equipment Ground	Ground Lug
------------------	------------

Hub Opening	Plain Top
-------------	-----------





Line Side Wire Range	6 AWG - 350 kcmil
----------------------	-------------------

Load Side Wire Range	6 AWG - 350 kcmil
----------------------	-------------------

Number Of Receptacles	0
-----------------------	---

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	1	1/4, 1/2 CONC. K.O.
B	1	3/4, 1, 1 1/4, 1 1/2 CONC. K.O.
C	5	1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.
D	1	1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O.

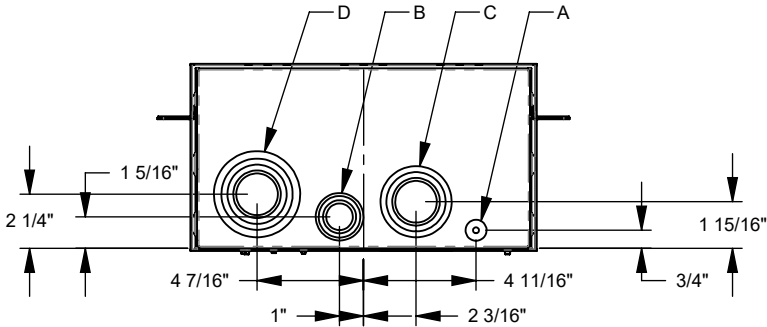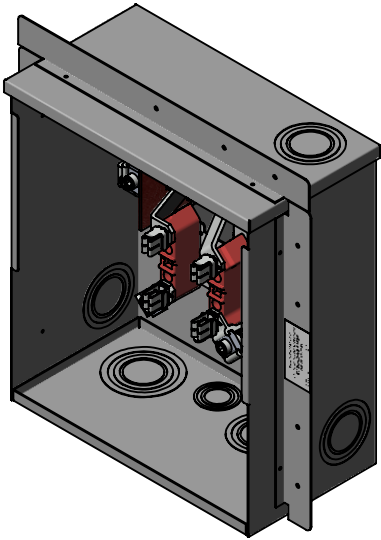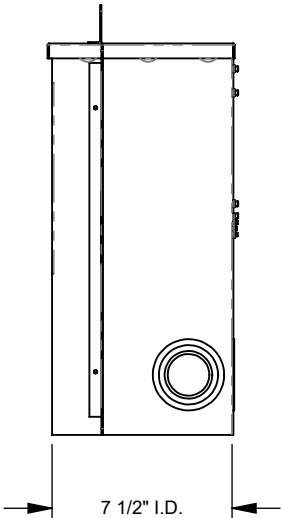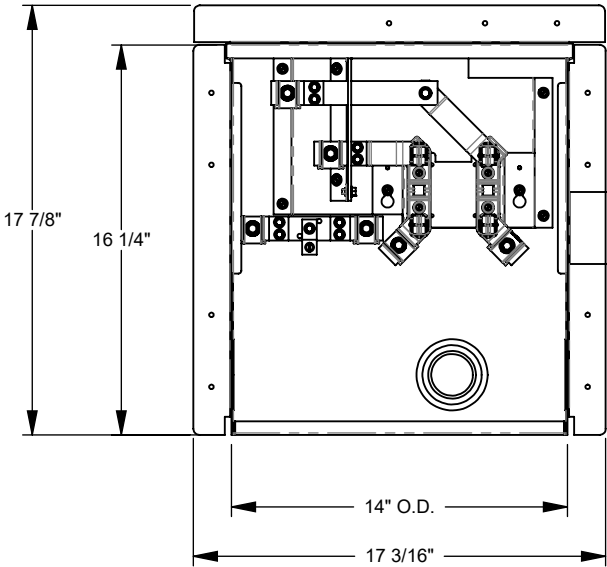

Version:
1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.