



MILBANK
ENERGY AT WORK



S1797-X




Catalog Number	S1797-X
Marketing Product Description	4 Terminal Ringless Large Closing Plate Lever Bypass Stud Type
UPC	784572121089
Length (IN)	4.844
Width (IN)	15
Height (IN)	30
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket
Standard	Non UL Listed;Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	320 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	4.844L x 15W x 30H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Overhead or Underground
Terminal	Single Mechanical
Insulation	Glass Polyester
Mounting	Surface Mount

Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	1 Position
Equipment Ground	Grounding Stud
Hub Opening	Large Closing Plate
Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil;No Lugs Provided orTwo 4 AWG – 350 kcmil or Two 4 AWG – 500 kcmil or Two 2 AWG – 500 kcmil
Load Side Wire Range	Two 6 AWG - 350 kcmil;No Lugs Provided or Two 4 AWG – 350 kcmil orTwo 4 AWG – 500 kcmil or 1/0 AWG – 300 kcmil
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

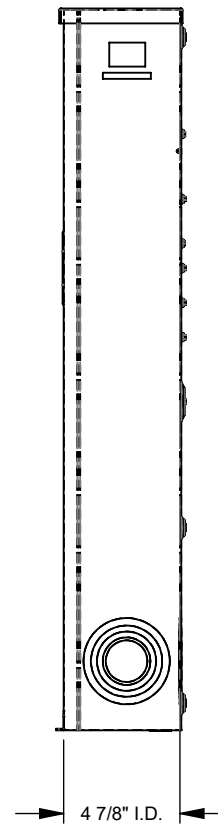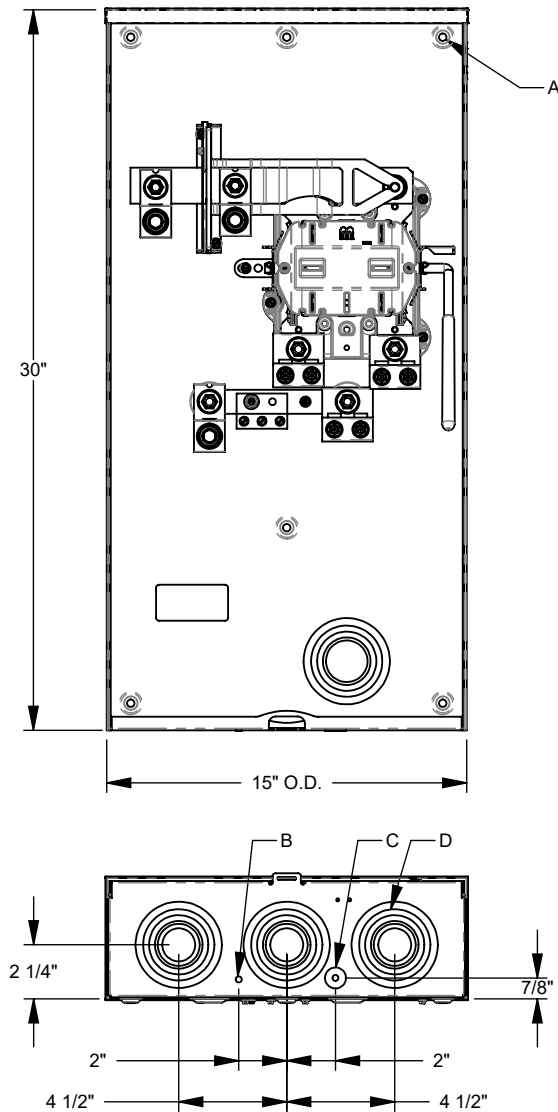

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	STD. MNTG. EMBOSS
B	1	1/4 SOLID K.O.
C	1	1/4, 1/2 CONC. K.O.
D	5	1, 1/4, 1/2, 2, 2 1/2, 3 CONC. K.O.

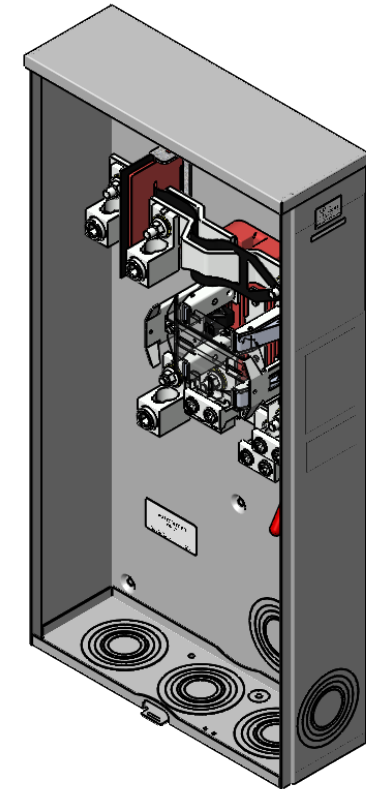

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.