




MILBANK
ENERGY AT WORK




U5101-XL-100MB-11GR

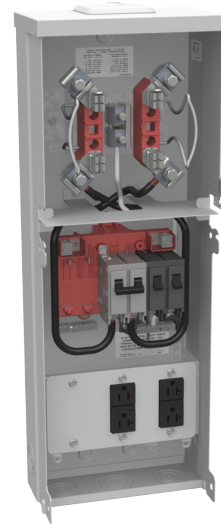


Catalog Number	U5101-XL-100MB-11GR
Marketing Product Description	4 Terminal Ringless Small Closing Plate 1-100 Ampere Main Breaker 520GR 520GR Surface Mount
UPC	784572279575
Length (IN)	5.186
Width (IN)	8.875
Height (IN)	25
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Temporary Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	100 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	5.186L x 8.875W x 25H
Number Of Cutouts	2
Cutout Size	Breaker Provision
Cable Entry	Overhead or Underground
Terminal	Lay in
Insulation	Glass Polyester

Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	No Bypass
Number of Meter Positions	1 Position
Equipment Ground	Ground Bar
Hub Opening	Small Closing Plate
Line Side Wire Range	6 AWG - 350 kcmil
Number Branch Circuits	6
Number Of Receptacles	2
Receptacle Configuration	Two NEMA 5-20 Ground Fault

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

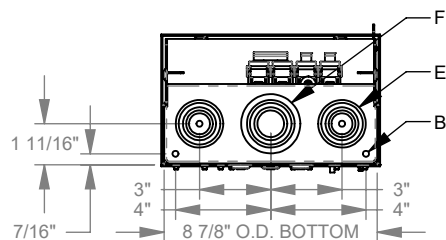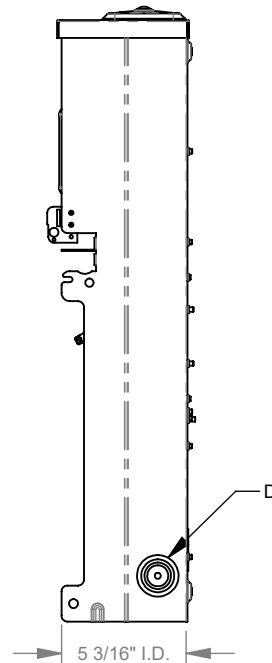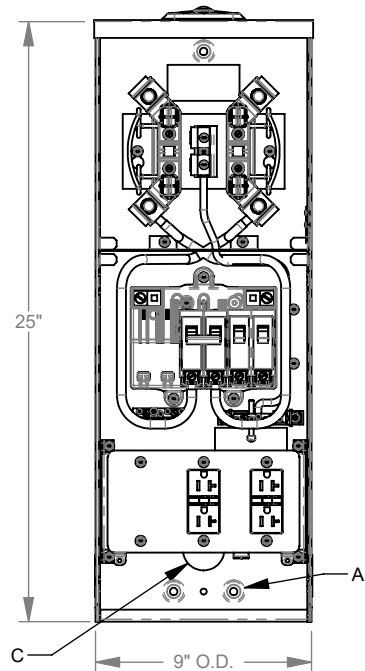

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	3	U/L MOUNTING EMBOSS
B	3	.25 SOLID K.O.
C	1	1.25 SOLID K.O.
D	2	.50, .75, 1.00, 1.25 CONC. K.O.
E	2	.50, .75, 1.00, 1.25, 1.50 CONC. K.O.
F	1	.75, 1, 1.25, 1.50, 2.00 CONC. K.O.

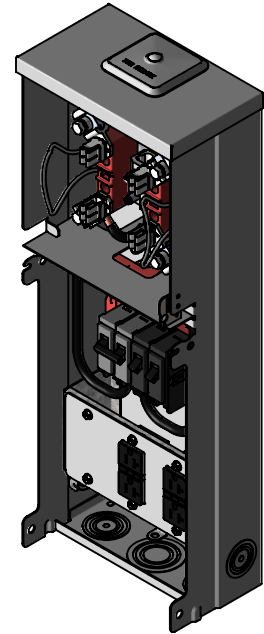

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.