



MILBANK[®]
ENERGY AT WORK




U5713-XL-5T-K3-BLG



Catalog Number	U5713-XL-5T-K3-BLG	Mounting	Surface Mount
Marketing Product Description	5 Terminal Ring Type Small Closing Plate 3 Position Single Connector 4-600kcmil 7-8 In Barrel Lock Ground With Bracket Provision	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572322301	Jaw Quantity	5 Terminal
Length (IN)	4.5	Bypass Type	No Bypass
Width (IN)	39.94	Number of Meter Positions	3 Positions
Height (IN)	14	Equipment Ground	Ground Lug
Brand Name	Milbank	Hub Opening	Small Closing Plate
Type	Ring Type Meter Socket	Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Application	Meter Socket	Load Side Wire Range	6 - 2/0 AWG
Standard	UL Listed;Type 3R	Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Voltage Rating	300 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	100 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.5L x 39.94W x 14H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Single Mechanical		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	STD. MNTG. EMBOSS
B	2	¼, ½ CONC. K.O.
C	5	¾, 1, 1¼, 1½ CONC. K.O.
D	4	1¼, 1½, 2, 2½ CONC. K.O.

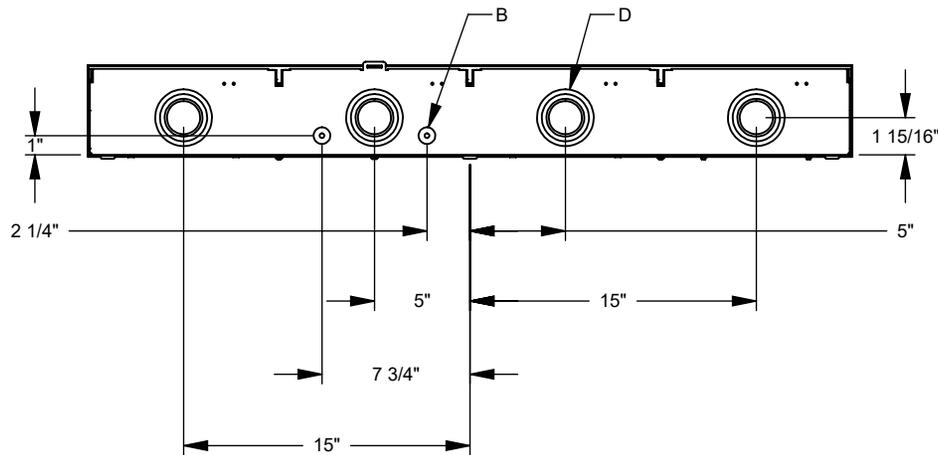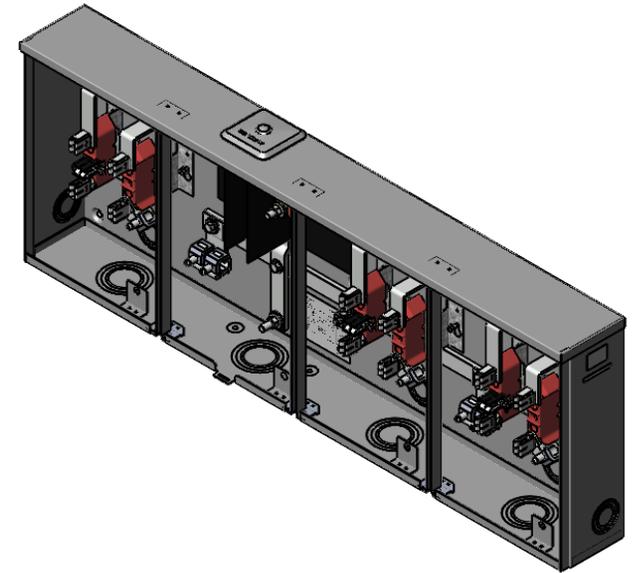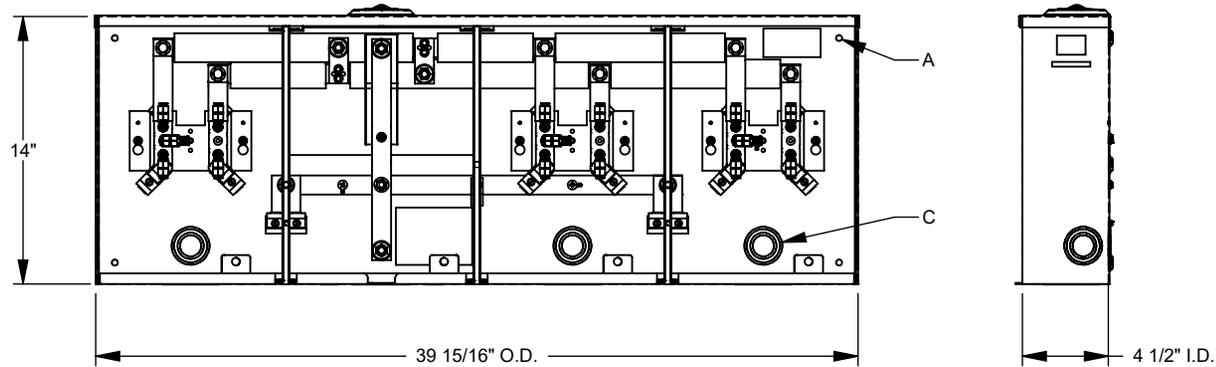

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.