



MILBANK
ENERGY AT WORK



U5706-O-200S-KK-CECHA




Catalog Number	U5706-O-200S-KK-CECHA
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass 1-200 Ampere Main Breaker Single Pedestal Pad Mount Direct Bury Commonwealth Edison Chicago Housing Authority
UPC	784572506350
Length (IN)	5.5
Width (IN)	14
Height (IN)	80
Brand Name	Milbank
Type	Ringless Meter Socket
Special Features	Commonwealth Edison Chicago Housing Authority
Application	Temporary to Final Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	5.5L x 14W x 80H
Number Of Cutouts	1
Cutout Size	One 200 Ampere Main Breaker

Cable Entry	Underground
Terminal	Lay in
Insulation	Glass Polyester
Mounting	Pedestal
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Horn Bypass
Number of Meter Positions	Single Power Head
Equipment Ground	Ground Bar
Hub Opening	Plain Top
Number Branch Circuits	4
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

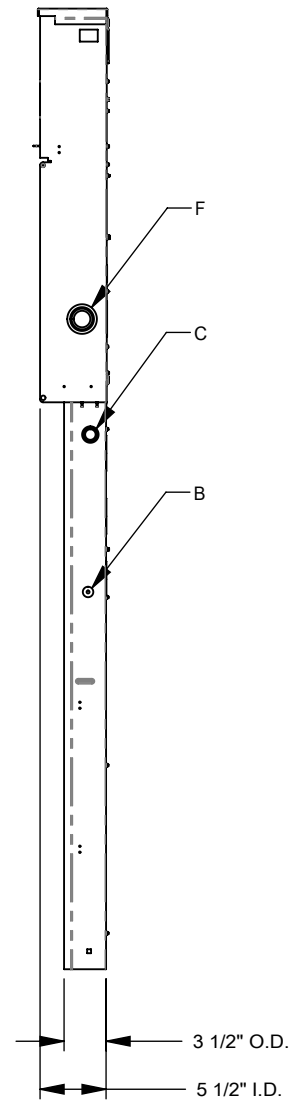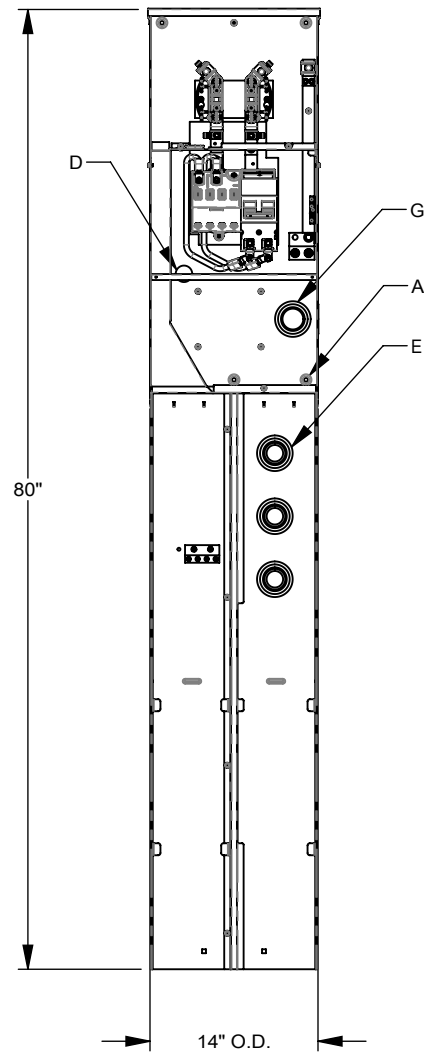

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	U/L MNTG.EMBOSS
B	1	1/4, 1/2 CONC. K.O.
C	1	3/4, 1 CONC. K.O.
D	1	1 SOLID K.O.
E	3	1, 1 1/4, 2, 2 1/2 CONC. K.O.
F	1	1, 1 1/4, 1 1/2, 2 CONC. K.O.
G	1	1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.

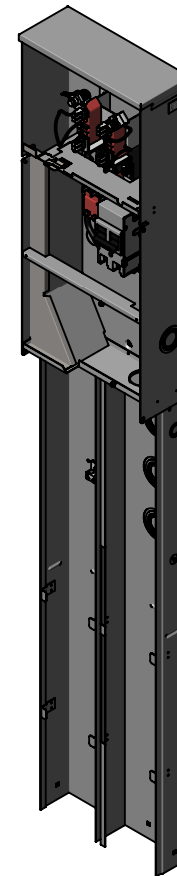

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.