




U5787-O-200-CB-BGE



Catalog Number	U5787-O-200-CB-BGE	Insulation	Glass Polyester
Marketing Product Description	7 Terminal Ringless Plain Top Lever Bypass 1-200 Ampere Main Breaker Cold Sequence Baltimore Gas And Electric	Mounting	Surface Mount
UPC	784572514508	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.844	Jaw Quantity	7 Terminal
Width (IN)	26	Bypass Type	Lever Bypass
Height (IN)	28	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Large Closing Plate
Special Features	Baltimore Gas and Electric	Line Side Wire Range	1/0 AWG - 350kcmil
Application	Meter Socket With Main	Load Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	Up to 600 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	3 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 26W x 28H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Single Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	5	1 $\frac{1}{4}$, 1 $\frac{1}{2}$, 2, 2 $\frac{1}{2}$, 3 CONC. K.O.
C	4	1 $\frac{1}{4}$, 1 $\frac{1}{2}$, 2, 2 $\frac{1}{2}$ CONC. K.O.
D	2	1/4 SOLID K.O.
E	2	1/4, 1/2 CONC. K.O.

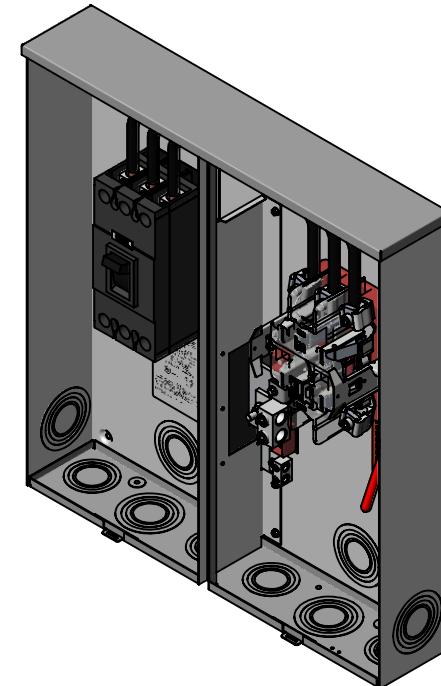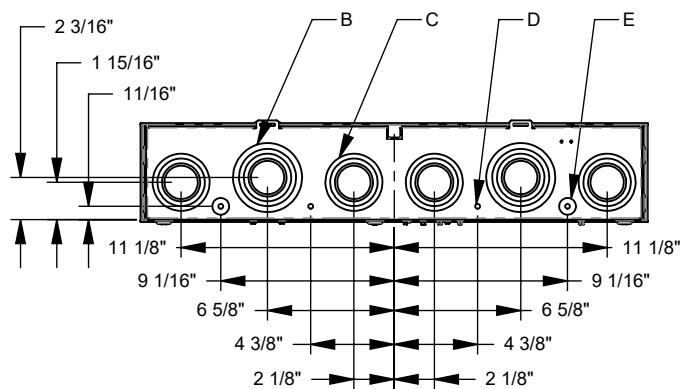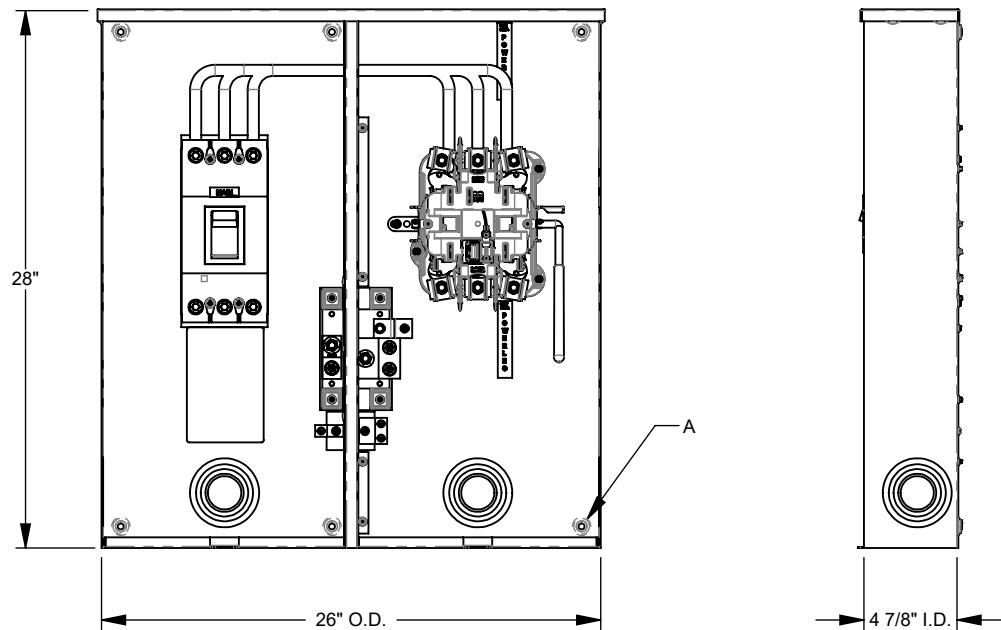

All dimensions are +/- 1/16".
Drawing Views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.