




MILBANK
ENERGY AT WORK



U5786-X-2/K2-5T6-BL-AMS

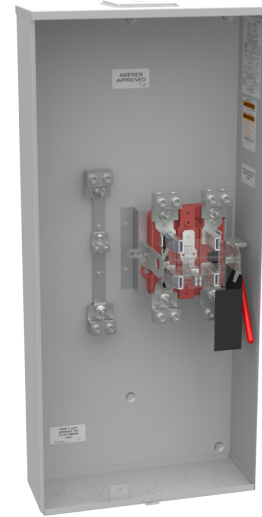

Catalog Number	U5786-X-2/K2-5T6-BL-AMS	Insulation	Glass Polyester
Marketing Product Description	5 Terminal Ringless Large Closing Plate Lever Bypass 2-double Connector 6-350kcmil 9-16 In Barrel Lock With Bracket Provision Ameren	Mounting	Surface Mount
UPC	784572721425	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	6.5	Jaw Quantity	5 Terminal
Width (IN)	17.75	Bypass Type	Lever Bypass
Height (IN)	36.75	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Large Closing Plate
Special Features	Ameren Energy	Line Side Wire Range	Two 6 AWG - 350 kcmil
Application	Meter Socket	Load Side Wire Range	Two 6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Provision
Voltage Rating	600 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	6.5L x 17.75W x 36.75H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	¼ SOLID K.O.
C	5	2, 2½, 3 CONC. K.O.

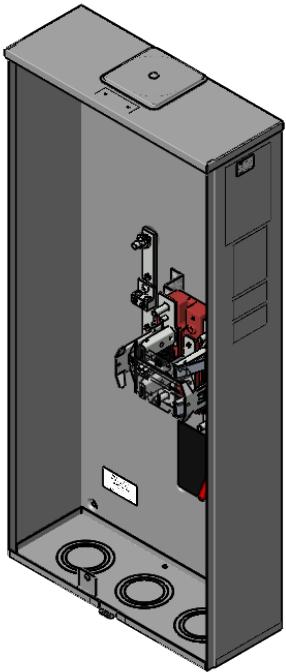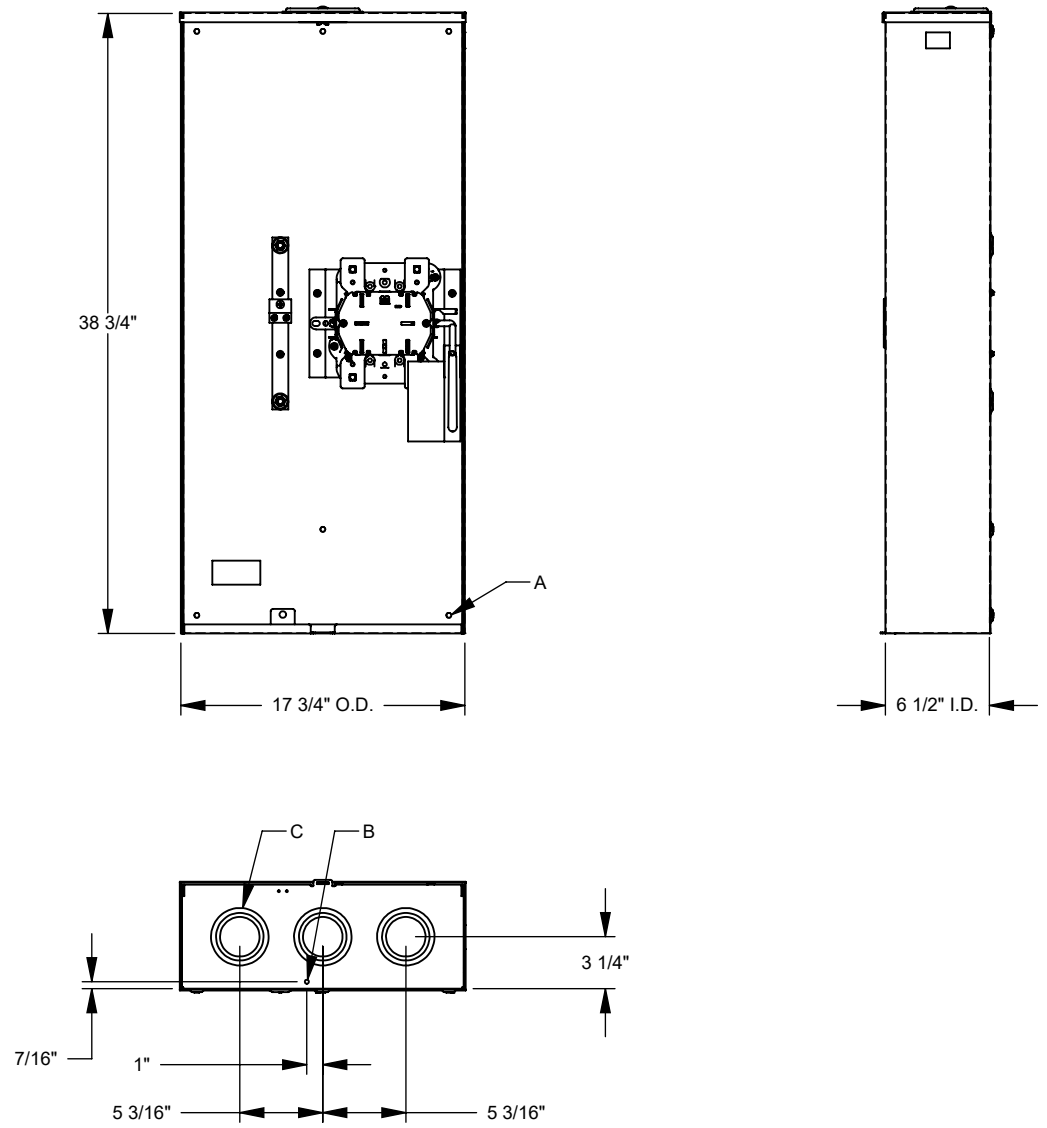

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.