


## U5852-RL-100





Catalog Number	U5852-RL-100
Marketing Product Description	4 Terminal Ring Type Small Hub Open 1-100 Ampere Main Breaker 200 Ampere
UPC	784572512757
Length (IN)	4.125
Width (IN)	8
Height (IN)	30
Brand Name	Milbank
Туре	Ring Type Meter Socket
Application	Meter Socket With Main
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	4.125L x 8W x 30H
Number Of Cutouts	1
Cutout Size	One 100 Ampere Main Breaker
Cable Entry	Overhead
Terminal	Lay in
Insulation	Glass Polyester


Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	No Bypass
Number of Meter Positions	1 Position
Equipment Ground	2 Barrel Ground Lug
Hub Opening	Small Hub Opening
Line Side Wire Range	6 AWG - 350 kcmil
Load Side Wire Range	4 - 1/0 AWG
Number Of Receptacles	0


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

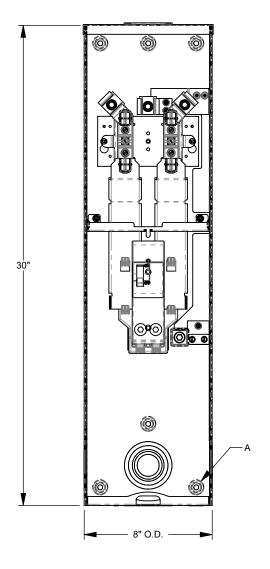







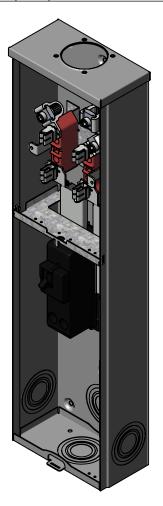



## All dimensions are +/- 1/16". Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.