



200 Amp Ringless Meter Main

U5898-O-200

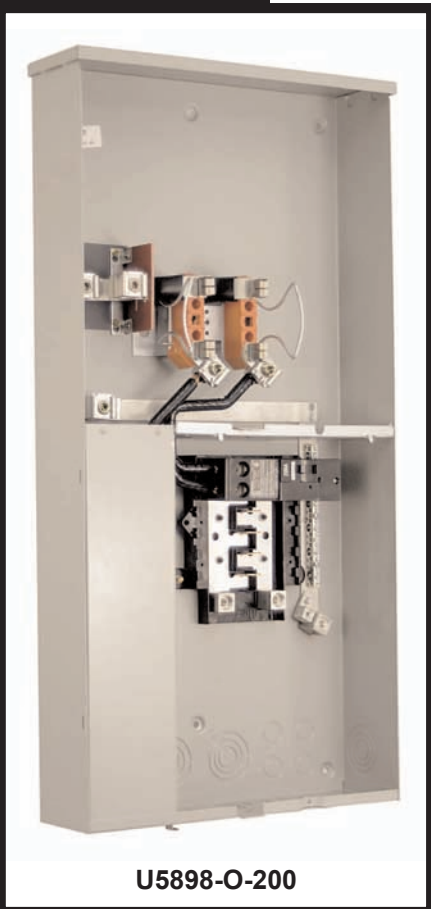

U5898-O-200

- 200 amp continuous rating
- 200 amp Siemens main breaker
- Side wireway for easy underground installation
- 4-terminal, 1Ø3W
- Rated 22K AIC
- Universal 8-circuit copper interior breaker panel
- Sub-feed lugs included

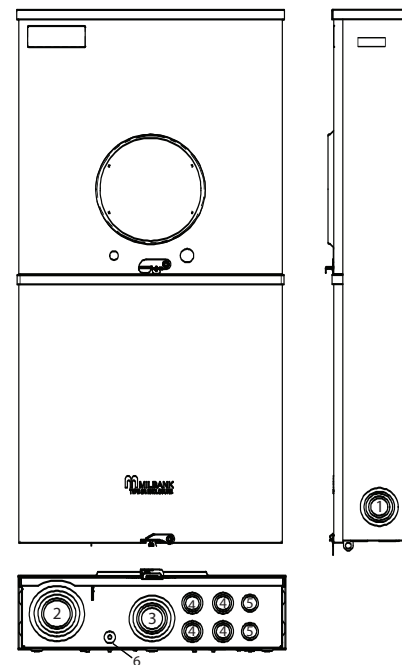

200 AMP METER MAIN WITH BREAKERS — 1 Ø3W — RINGLESS — 120/240V

CATALOG NUMBER	SERVICE	CONNECTORS CU/AL		DIMENSIONS			CONCENTRIC K.O.'S					
		LINE	LOAD	D"	W"	H"	1	2	3	4	5	6
U5898-O-200	UG	#6-350 kcmil	#6-350 kcmil	4½	17	34½	2	3	2½	1	1½, 3/4	1¼, 1/2

FIFTH TERMINAL: For field-installed fifth terminal, order separately catalog number **K5T**. Available with factory-installed fifth terminal – add suffix **-5T9** for 9:00 position. Can be rotated to 6:00 position.

INTERLOCK KIT: For generator auxiliary circuit breaker interlock for large frame **QN** with small frame **Q** order **K5815**; for large frame **QN** with large frame **QN** order **K5820**.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

5898 03/10 (600)

