




MILBANK
ENERGY AT WORK

U5100-XL

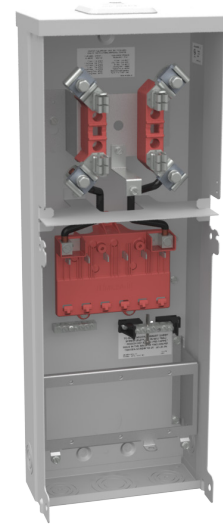

Catalog Number	U5100-XL
Marketing Product Description	4 Terminal Ring Type Small Closing Plate Surface Mount
UPC	784572258808
Length (IN)	5.188
Width (IN)	8.875
Height (IN)	25
Brand Name	Milbank
Type	Ring Type Meter Socket
Application	RV Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	125 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	5.188L x 8.875W x 25H
Number Of Cutouts	0
Cutout Size	Breaker Provision
Cable Entry	Overhead or Underground
Terminal	Lay in
Insulation	Glass Polyester
Mounting	Surface Mount

Enclosure	G90 Galvanized Steel with Powder Coat Finish
-----------	--

Jaw Quantity	4 Terminal
--------------	------------

Bypass Type	No Bypass
-------------	-----------

Number of Meter Positions	Single Power Head
---------------------------	-------------------

Equipment Ground	Ground Bar
------------------	------------




Hub Opening	Small Closing Plate
-------------	---------------------

Line Side Wire Range	6 AWG - 350 kcmil
----------------------	-------------------


Number Branch Circuits	6
------------------------	---

Number Of Receptacles	0
-----------------------	---

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

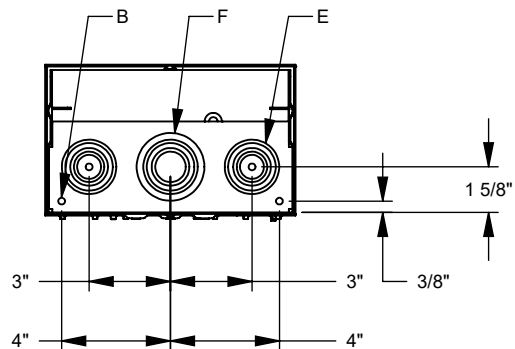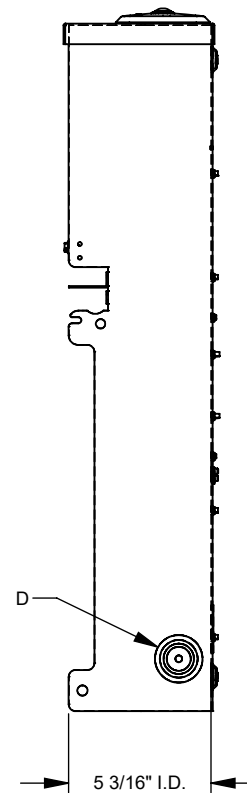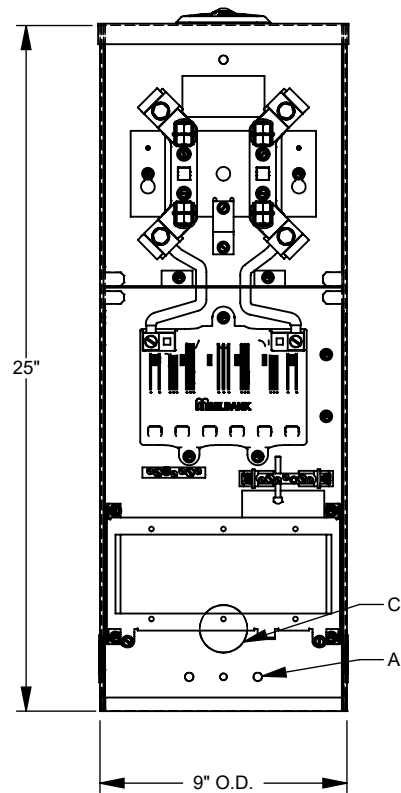

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	3	U/L MNTG.EMBOSS
B	2	1/4 SOLID K.O.
C	1	1 1/4 SOLID K.O.
D	2	1/2, 3/4, 1, 1 1/4 CONC. K.O.
E	2	1/2, 3/4, 1, 1 1/4, 1 1/2 CONC. K.O.
F	1	3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O.

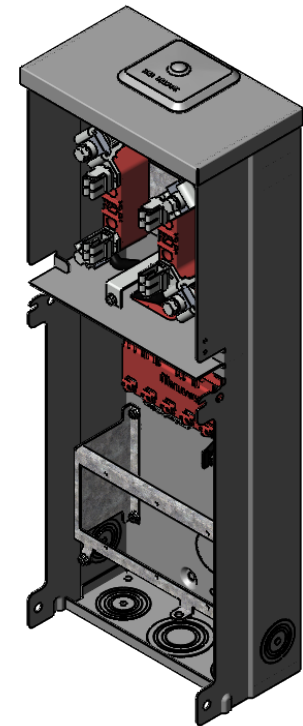

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.