



U5137-O-200S-FMG

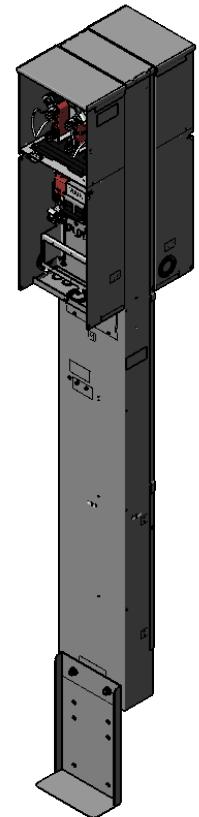

Catalog Number	U5137-O-200S-FMG	Mounting	Pedestal
Marketing Product Description	4 Terminal Ringless Plain Top 2-200 Ampere Main Breaker Double Pedestal Direct Bury Florida Meter Group	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572276123	Jaw Quantity	4 Terminal
Length (IN)	16.063	Bypass Type	Horn Bypass
Width (IN)	9.688	Number of Meter Positions	Double Power Head
Height (IN)	80	Equipment Ground	Ground Bar
Brand Name	Milbank	Hub Opening	Plain Top
Type	Ringless Meter Socket	Line Side Wire Range	6 AWG - 350 kcmil
Application	Mobile Home Power	Load Side Wire Range	1/0 AWG - 300 kcmil
Standard	UL Listed; Type 3R	Number Branch Circuits	4
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	16.063L x 9.688W x 80H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Double Mechanical		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

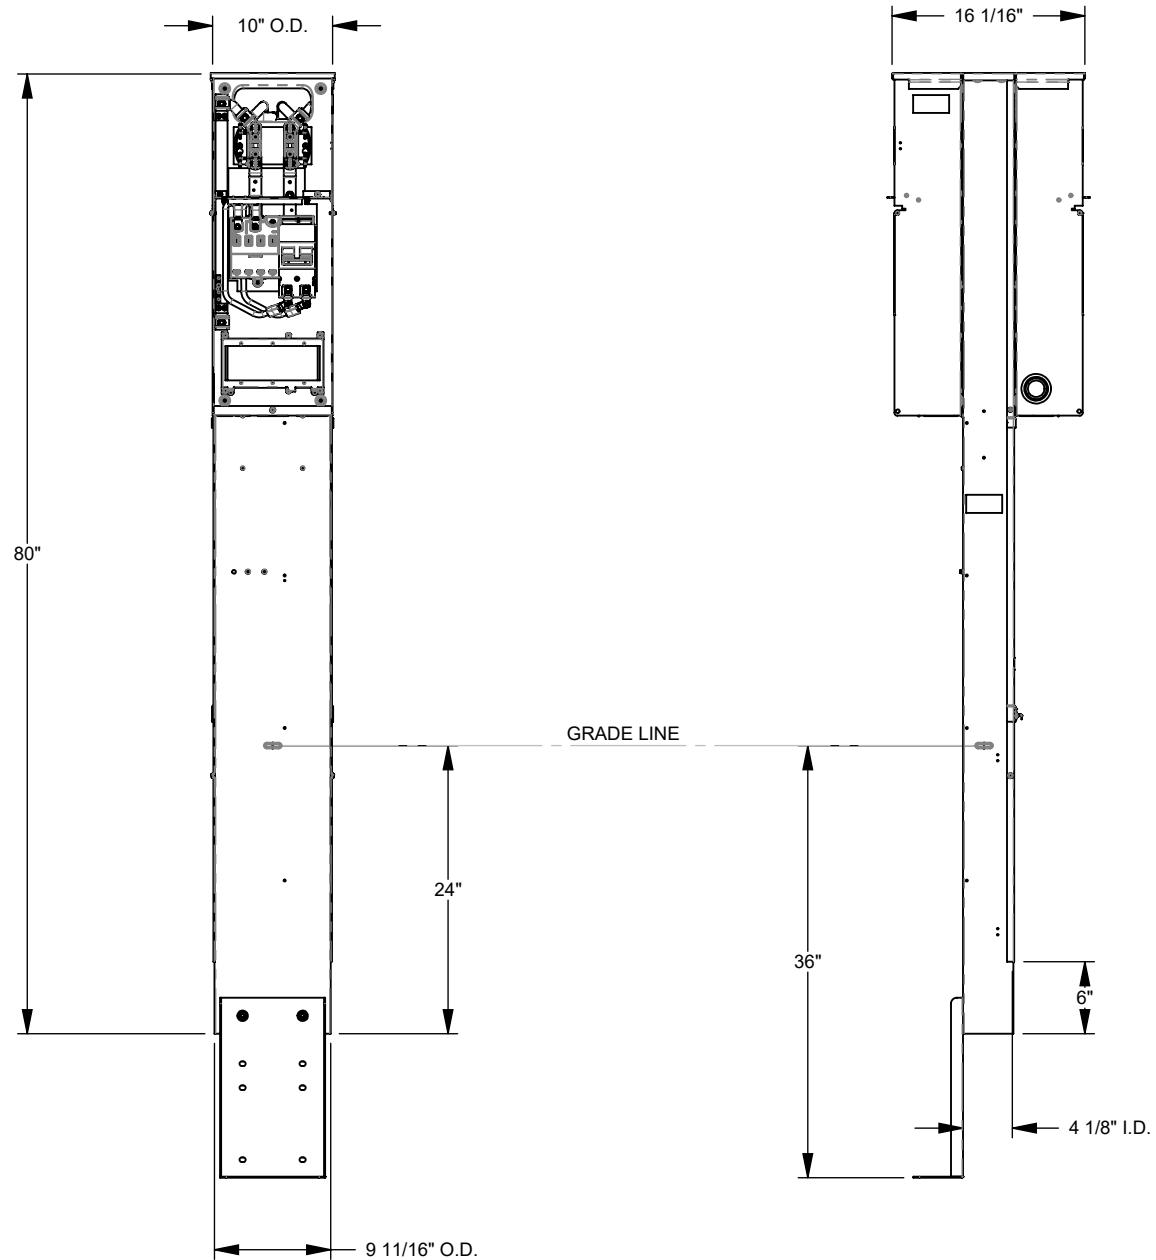

All dimensions are $\pm 1/16"$.
Drawing Views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.