



MPAP-200-20GR-78

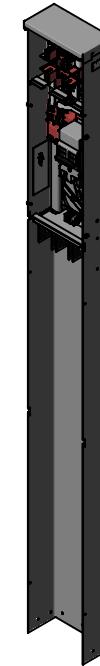

Catalog Number	MPAP-200-20GR-78	Terminal	Double Mechanical
Marketing Product Description	4 Terminal Ring Type Plain Top 1-200 Ampere Main Breaker 520GR Direct Bur	Insulation	Fiberglass with Resin
UPC	784572184558	Mounting	Pedestal
Length (IN)	4.01	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Width (IN)	8.16	Jaw Quantity	4 Terminal
Height (IN)	78	Bypass Type	No Bypass
Brand Name	Milbank	Number of Meter Positions	1 Position
Type	Ring Type Meter Socket	Equipment Ground	Ground Bar
Special Features	Single Pole 20 Ampere Breaker	Hub Opening	Plain Top
Application	Mobile Home Power	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed; Type 3R	Number Branch Circuits	3
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	1
Amperage Rating	200 Continuous Ampere	Receptacle Configuration	One NEMA 5-20 Ground Fault
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.01L x 8.16W x 78H		
Number Of Cutouts	2		
Cutout Size	One 200 Ampere Main Breaker and One Single Pole 20 Ampere Breaker		
Cable Entry	Underground		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

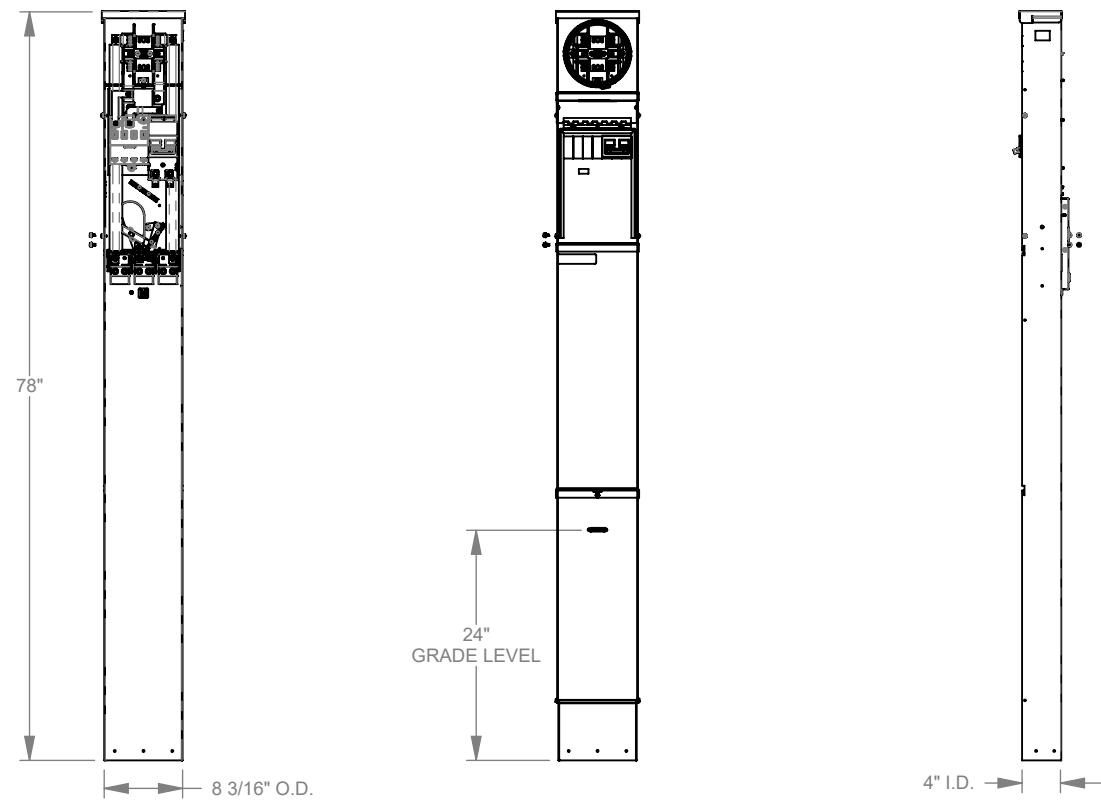

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.