

U5777-O







Catalog Number	U5777-O	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Marketing Product Description	4 Terminal Ringless Plain Top Side Bussed No Bypass	Jaw Quantity	4 Terminal
UPC	784572470040	Bypass Type	No Bypass
Length (IN)	4.844	Number of Meter Positions	1 Position
Width (IN)	15	Equipment Ground	2 Barrel Ground Lug
Height (IN)	30	Hub Opening	Plain Top
Brand Name	Milbank	Load Side Wire Range	6 AWG - 350 kcmil
Type	Ringless Meter Socket	Number Of Receptacles	0
Application	Meter Socket		
Standard	UL Listed; Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 15W x 30H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Underground with Side Wireway		
Terminal	3/8 Inch Stud		
Insulation	Glass Polyester		
Mounting	Surface Mount		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE

ITEM	QT Y	DESCRIPTION
A	6	STD. MNTG. EMBOS
B	1	1/4 SOLID K.O.
C	1	1/4, 1/2 CONC. K.O.
D	5	1, 1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O.

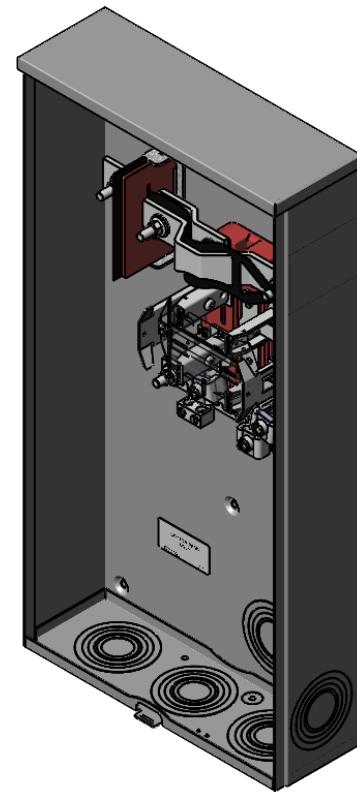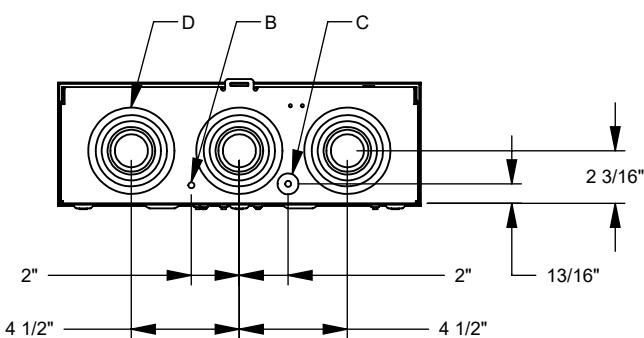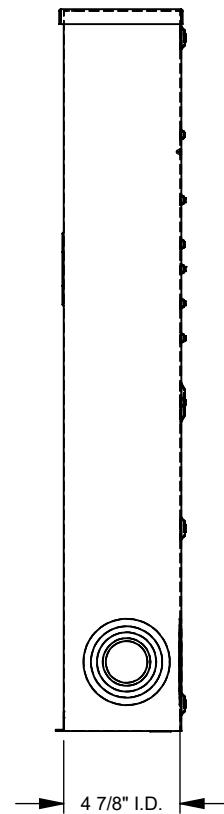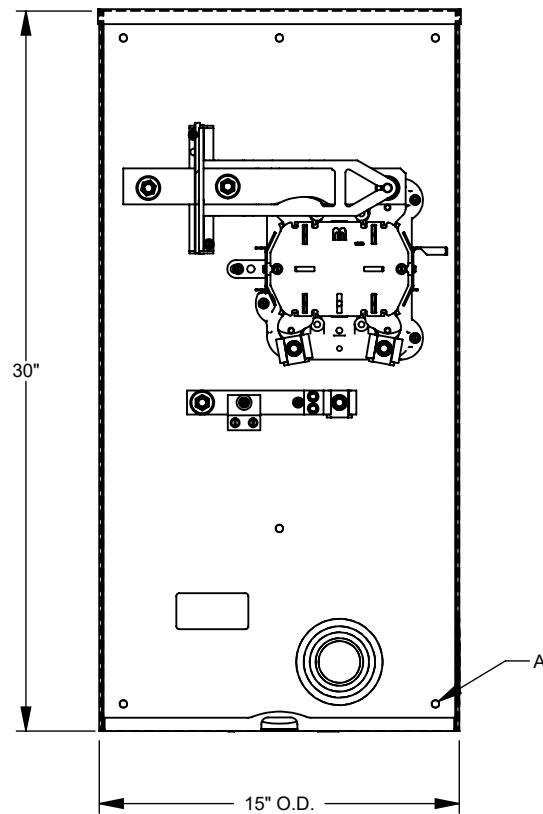

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.