



U5701-O-100S-5T6

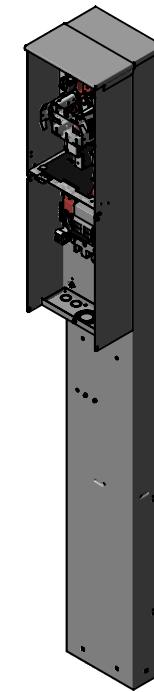

Catalog Number	U5701-O-100S-5T6	Insulation	Glass Polyester
Marketing Product Description	5 Terminal Ringless Plain Top Lever Bypass 1-100 Ampere Main Breaker 5th Terminal 6 Oclock Position Single Pedestal Direct Bury	Mounting	Pedestal
UPC	784572674844	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	10.27	Jaw Quantity	5 Terminal
Width (IN)	9.875	Bypass Type	Lever Bypass
Height (IN)	80	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	4 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Plain Top
Application	Meter Socket With Main And Load Center	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Load Side Wire Range	1 AWG - 300 kcmil
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	10.27L x 9.875W x 80H		
Number Of Cutouts	1		
Cutout Size	One 100 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

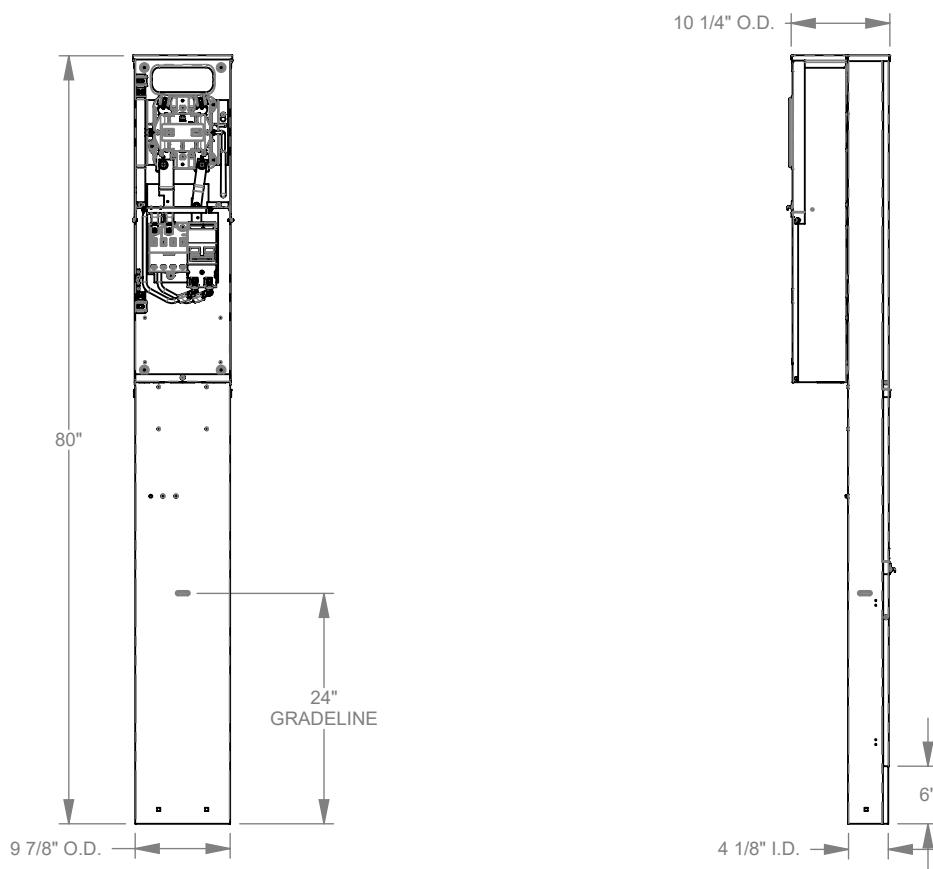

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.